


RCBO - Residual Current Circuit Breaker with Over Current Protection

		SRE-2	SRM-2
Instantaneous tripping characteristic		B, C	B, C
Rated operating voltage	V AC	230 (240)	230
Rated frequency	Hz.	50...60	50...60
Rated current (In)	A	6, 10, 16, 20, 32, 40	6, 10, 16, 20, 32, 40
Residual current (IΔn)	mA	30-100-300	30-300
Rated ultimate short-circuit breaking capacity	kA	6	6
Connection section	mm ²	0.75 ... 16	1.5 - 3.5
Max. clamping torque	Nm	2	2
Degree of protection		IP20	IP20
Electrical life (No. operation)		6.000	6.000
Mechanical life (No. operation)		20.000	20.000
Storage ambient temperature	°C	-40 to +75	-40 to +70
Operating ambient temperature	°C	-25 to +55	-25 to +55
Relative humidity	%	90	90
CFC-silicone free		Yes	Yes

Circuit Diagram

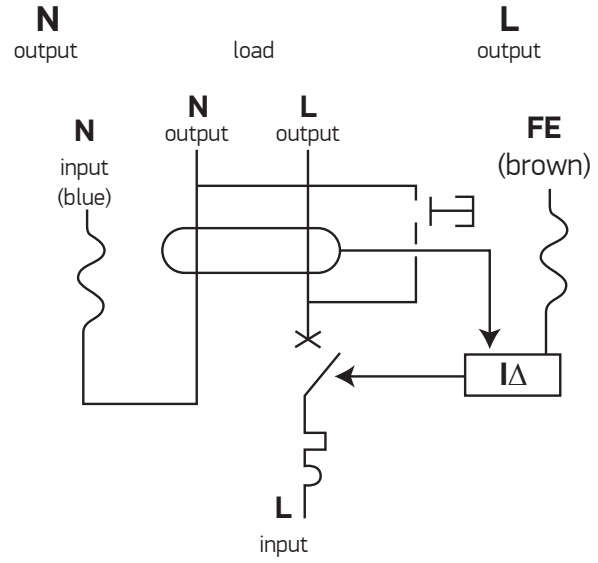

Dimensions

