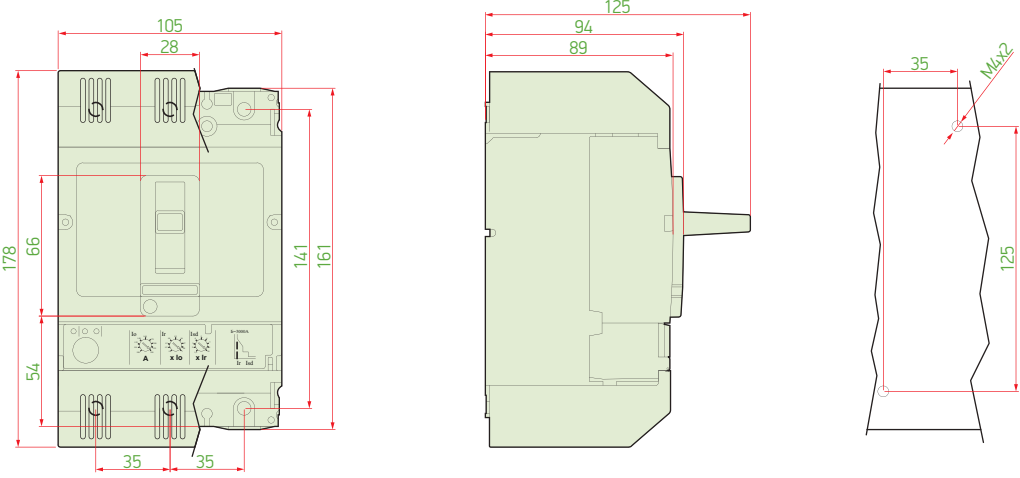
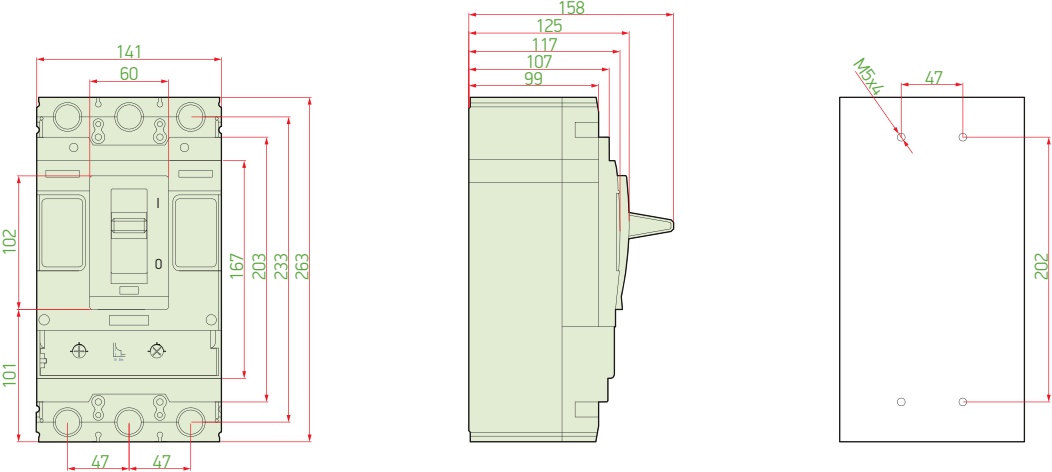
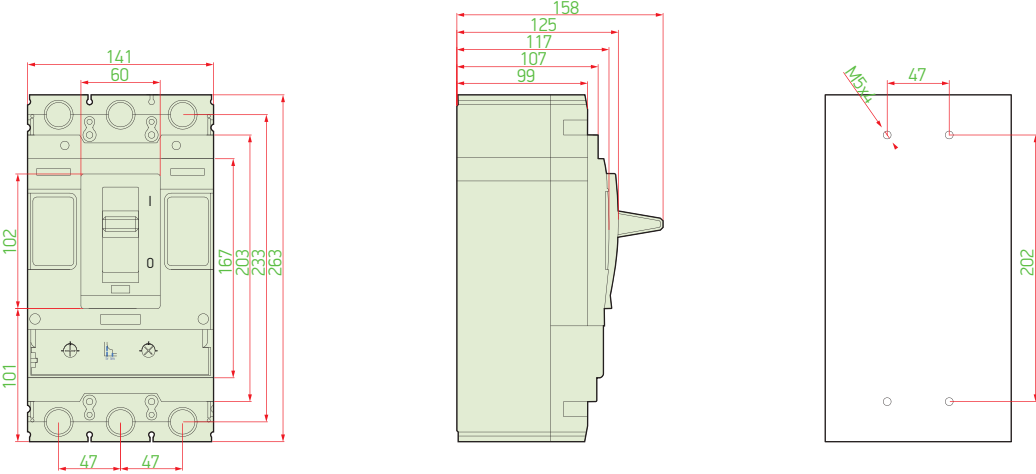


Teknik Özellikler

				U250		U400		U630		U1600
Standart				IEC / EN 60947-2		IEC / EN 60947-2		IEC / EN 60947-2		IEC / EN 60947-2
Anma Akımı (40°C de)	A			40, 100, 160, 250		400		630		800, 1000, 1250, 1600
Kutup Sayısı				3	4	3	4	3	4	3
Anma Çalışma Gerilimi	Ue	V	AC	400		400		400		400
Anma Yalıtım Gerilimi	Ui	V	AC	1000		1000		1000		1000
1 Dakika Süreli Test Gerilimi		V	AC	3000		3000		3000		3000
Anma Yıldırım Darbe Gerilimi	Uimp	kV	AC	8		8		8		8
Anma Maksimum Kısa Devre Kesme Kapasitesi	Icu	kA	690 V AC	8		16		16		25
			500 V AC	9		42		42		35
			440 V AC	22		50		50		50
			415 V AC	36		70		70		70
			240 V AC	50		85		85		85
			250 V DC (3 Kutup Seri)	15		30		30		–
Anma İşletme Kısa Devre Kesme Kapasitesi	Ics	kA	690 V AC	8		16		16		25
			500 V AC	9		42		42		35
			440 V AC	22		50		50		50
			415 V AC	36		70		70		70
			240 V AC	50		85		85		85
			250 V DC (3 Kutup Seri)	10		23		23		–
Kullanma Kategorisi				A		A		A		A
Kirlenme Derecesi				3		3		3		3
Elektriksel Ömür	ON - OFF		415 V	8.000		8.000		8.000		4.000
Mekanik Ömür	ON - OFF			20.000		15.000		15.000		8.000
Koruma Ünitesi				Elektronik		Elektronik		Elektronik		Elektronik
Koruma Ünitesi Değerleri				Io: 0,4-1 Ir: (0,9-1) x Io Isd: (1,5-10) x Ir		Io: 0,5-1 Ir: (0,8-1) x Io Isd: (2-10) x Ir		Io: 0,5-1 Ir: (0,8-1) x Io Isd: (2-10) x Ir		Ir: (0,4-1)xIn; Im: (2-10)xIn
Çalışma Ortam Sıcaklığı Aralığı	°C			-20 ile +60		-20 ile +60		-20 ile +60		-20 ile +60
Depolama Ortam Sıcaklığı Aralığı	°C			-40 ile +80		-40 ile +80		-40 ile +80		-40 ile +80

Boyutlar

U250	 Technical drawing of the U250 circuit breaker. The front view shows a width of 105mm and a height of 178mm. The side view shows a depth of 125mm. The top view shows a width of 94mm and a height of 125mm. The front view also shows a width of 28mm and a height of 66mm. The side view shows a depth of 89mm. The top view shows a width of 35mm and a height of 125mm. The front view also shows a width of 35mm and a height of 54mm. The side view shows a depth of 125mm. The top view shows a width of 35mm and a height of 125mm.
U400	 Technical drawing of the U400 circuit breaker. The front view shows a width of 141mm and a height of 102mm. The side view shows a depth of 158mm. The top view shows a width of 125mm and a height of 202mm. The front view also shows a width of 60mm and a height of 101mm. The side view shows a depth of 125mm. The top view shows a width of 117mm and a height of 202mm. The front view also shows a width of 47mm and a height of 167mm. The side view shows a depth of 107mm. The top view shows a width of 99mm and a height of 202mm. The front view also shows a width of 47mm and a height of 203mm. The side view shows a depth of 158mm. The top view shows a width of 125mm and a height of 202mm.
U630	 Technical drawing of the U630 circuit breaker. The front view shows a width of 141mm and a height of 102mm. The side view shows a depth of 158mm. The top view shows a width of 125mm and a height of 202mm. The front view also shows a width of 60mm and a height of 101mm. The side view shows a depth of 125mm. The top view shows a width of 117mm and a height of 202mm. The front view also shows a width of 47mm and a height of 167mm. The side view shows a depth of 107mm. The top view shows a width of 99mm and a height of 202mm. The front view also shows a width of 47mm and a height of 203mm. The side view shows a depth of 158mm. The top view shows a width of 125mm and a height of 202mm.

U1600

